

- Contemporary range of levers on square backplates (58mm by 58mm).
  - Concealed fixing.
  - Choose from passage leverset or dummy lever options.
  - Non-handed to suit left or right-handed doors.
- Note: Curvelle dummy lever is handed.
- For use with 1000, 3000 or 755 series mortice locks for exterior doors and with 480 or 960/980 series tubular latches for interior doors.

- Suits one 35mm and two 6mm diameter holes through door face when used with a 480 or 960/980 series tubular latch.

Note: A 50mm diameter hole is required when used with a 9909 privacy adaptor.

- To suit 32mm-45mm thick doors.\*
- Can be used on fire doors.



Applicable to 9900 Series Leversets only, not applicable to Privacy Adaptor.

### Brass Lever/Alloy Rose



Linear lever on square backplate  
9913 CP SC



President lever on square backplate  
9950 CP SC



Senator lever on square backplate  
9965 CP SC



Congress lever on square backplate  
9968 CP SC

### Alloy Lever/Alloy Rose



Radius lever on square backplate  
9944 CP SC



Aero lever on square backplate  
9961 CP SC



Curvelle lever on square backplate\*\*  
9962 CP SC

### Privacy Adaptor

- Concealed fixing.
- Internal locking, panic release from the inside and emergency access from the outside.
- Requires a 50mm diameter hole through door face.



Privacy adaptor with Linear leverset  
9909 CP SC

When ordering, add relevant finish code to form complete catalogue number, as shown under products illustrated.

For dummy lever versions, add 'D' to the number shown, followed by the relevant finish code.

\* Denotes longer screws available (FAMT 124) to suit 50mm thick doors.

\*\* Denotes for this dummy lever, specify Left (L) or Right-Handed (R) when ordering.





Applicable to Key Escutcheons only; not applicable to Auxiliary Privacy Set, Sliding Indicator Bolt Set or Sliding Bolt Set.

### Square Cylinder, Turnbutton and Emergency Release 58mm Escutcheons

- Coordinates with the 9900 series levers when used in conjunction with mortice locks.



Oval cylinder escutcheon\* to suit 1000 or 3000 series mortice locks  
**10E5 CP SC**



External oval cylinder escutcheon\* to suit 3000 series mortice locks  
**10E5E CP SC**



Emergency release escutcheon  
**10R5 CP SC**



Euro profile cylinder escutcheon\* to suit 755 series mortice lock  
**10EU5 CP SC**




Emergency release indicator escutcheon Red for engaged, green for released  
**10R15 CP SC**



Interior turnbutton escutcheon  
**10T5 CP SC**

### Auxiliary Privacy Set

- Normally installed above passage leverset to add privacy locking to internal doors.
- Incorporates privacy bolt, internal turnbutton escutcheon and external emergency release escutcheon.
- Concealed fixing. 60mm backset.
- Suits a 25mm diameter hole through door face. For doors 35mm to 45mm thick.

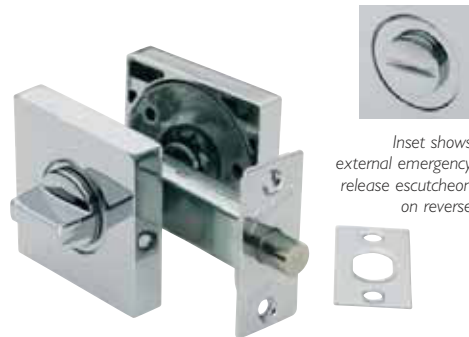

Auxiliary privacy set  
**99PS CP SC**

Specify 99PSI for privacy set with "Emergency" release indicator escutcheon. Red for engaged, green for released – can also be used as an indicator bolt.



### Sliding Indicator Bolt Set

- Suits sliding doors.
- Incorporates latch, internal turnbutton escutcheon and external emergency release escutcheon – shows red for engaged and green for released.
- Concealed fixing. 60mm backset.
- Suits a 35mm diameter hole through door face. For doors 35mm to 45mm thick.
- Not able to be recessed into cavity door pocket.



Sliding indicator bolt set  
**99SIB CP SC**

Also available:

### Sliding Bolt Set (without indicator)

- Features of this product are the same as detailed for 99SIB (above), however without indicator.

Sliding indicator bolt set  
**99SB CP SC**

When ordering, add relevant finish code to form complete catalogue number, as shown under products illustrated.

\* Denotes cylinder purchased separately.

## 480 and 960/980 Series Dual Sprung Tubular Latches

- Gainsborough tubular latches feature a heavy duty main spring for firm action and positive return during normal operation.
- Secondary latchbolt spring for easy door closure.
- Choose from delrin or steel hubs.
- 'D' or universal 'T' strikes available – refer specific catalogue number.
- Requires a 35mm diameter hole through door face and a 25mm diameter hole through door edge.



Rectangular face and strike  
60mm backset  
480 BC FB PB SC (481 70mm backset)



Rectangular face and universal strike  
60mm backset  
480T BC PB SC



Rectangular face and universal strike  
features sintered steel cam  
60mm backset, Heavy duty  
980 CP PB\* SC



Radius corner face and strike  
60mm backset  
488 BC PB

## ES1000 Electric Strike



Applicable to Electric Strikes only;  
not applicable to 480 and 960/980  
Series Dual Sprung Tubular Latches.

- The ES1000 Electric Strikes are designed for use with deadlatching mortice locks having up to 12mm throw latchbolt.
- The ES1000 Electric Strikes are available in un-monitored and monitored 12 volt or 24 volt DC for use on aluminium or timber frames.
- Power to lock (fail safe) or power to open (fail secure), can be changed on site by simply changing position of a screw.



Electric strike  
ES1000/12 SS  
ES1000/12M SS (Monitored)  
ES1000/24 SS  
ES1000/24M SS (Monitored)

When ordering, add relevant finish code to form complete catalogue number, as shown under products illustrated.

\* For this finish, order 960PB until stock depleted. On depletion, the 980PB will become available.